



SQ3

3 Band Equalizer preamp with chromatic LED tuner

ARTEC
<http://artecsound.com>

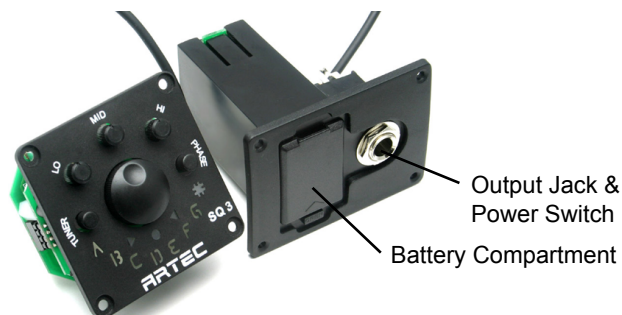

52mm X 52mm



FEATURES

3 Band EQ.

- TREBLE : High range (4kHz)
- MIDDLE : Mid range (800Hz)
- BASS : Low range (100Hz)

VOLUME : Master output level

PHASE : Phase reverse switch to reduce feedback.

TUNER : Power switch of built-in LED tuner.

* Sound output will be mute while tuner is on.

** Tuner can work without plugging into output jack.

SPECIFICATION

BATTERY : 9V Battery (Alkaline is recommended)

** Battery NOT included in package.


VOLTAGE RANGE : Min 7V to Max 12V

INPUT IMPEDANCE : 1 Mohm

OUTPUT IMPEDANCE : 1 Kohm

Power is OFF when unplugging output jack.


TUNING

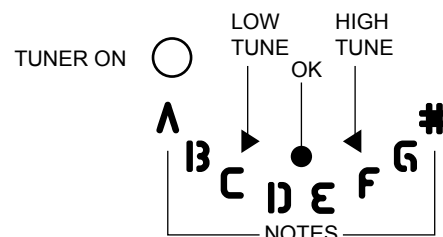


INSTALLATION

1. Find the location

- (1) **DO NOT** install on concave surface
- (2) Install on **FLAT** or **SLIGHTLY CONVEX**
- (3) **DO NOT** install on high convex surface

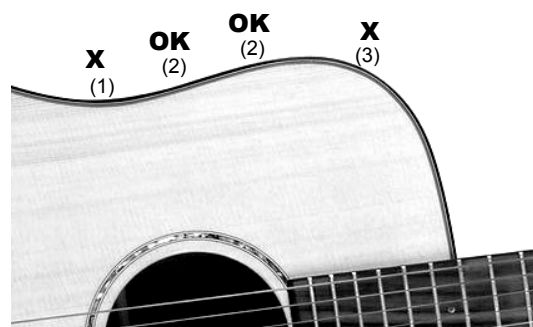

2. Cut out the hole with template

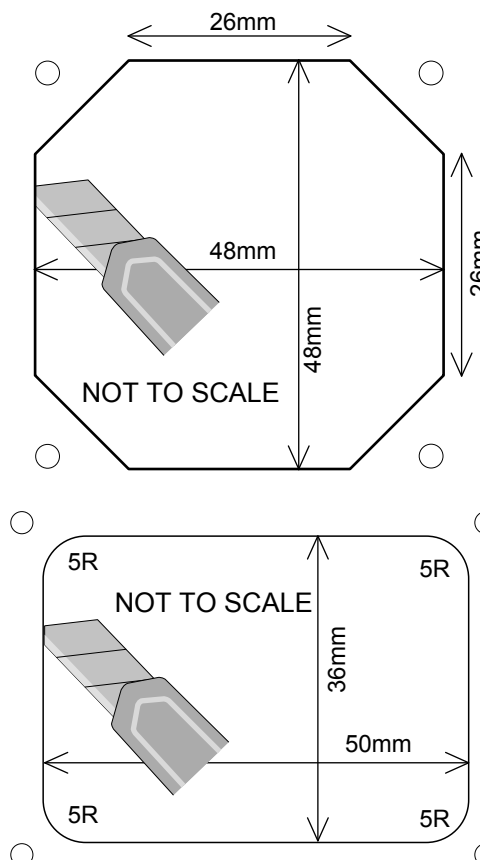

3. Install / screwing / put plugs into jacks.